OPSWAT.

METADEFENDER

Kiosk™ Desktop 3

Removable Media Security Kiosk

Stop breaches at the point of entry and help your organization mitigate removable media threats and meet compliance, in one easy to use appliance. MetaDefender Kiosk Desktop 3 is out of the box and deployed in just minutes, protecting your network perimeter from the threats of portable media.



Key Features



Advanced Threat Detection

Scan files with multiscanning technology powered by over 30 anti-malware engines, threat detection levels can exceed 99%.



Country of Origin Check

Gain insights and create policies based on country of origin for files and content.



File Vulnerability Assessment

Uncover vulnerabilities in installers, binaries, or applications before installation to plug any security holes.



File Storage & Data Diode

Integrates seamlessly with local, network, or cloud storage, MetaDefender Managed File Transfer, NetWall, and best-in-class data diode providers for secure data transfer and storage.



Media Validation Agent

Validate digital signatures every time media is inserted into a device, blocking unscanned media from accessing your environment.



Supports Common Media Types

USB Type-A, USB Type-C, SD, Micro SD, and CD/DVD



Privacy and Confidentiality Protection with DLP

Detect and block sensitive data and personally identifiable information (PII).



Clean & Reconstruct Suspicious Files

Remove suspect data from common file types, outputting sanitized and usable files with Deep CDR.



Scan Encrypted Drives

Comprehensively scan and sanitize a variety of encrypted drives.



Multiple File System & Virtual Disk Support

FAT, NTFS, Ext, HFS+ & APFS; VHD & VMDK.



Secure Erase


Wipe portable media completely clean, before loading approved content.



□ Central Management

Simplify Kiosk management in the cloud and on-premises.

METADEFENDER KIOSK DESKTOP

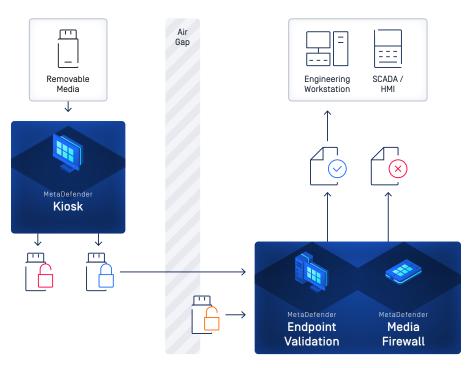

Prevent unscanned drives from accessing critical assets with MetaDefender Media Validation Agent and Media Firewall.

Support and Kiosk Managed Services

With more than a dozen offices around the world, OPSWAT's support team can provide you $24 \times 7 \times 365$ coverage. Focus on what matters most to your business and let our experts maintain and manage your Kiosks.



opswat.com/support

Support Hours	Silver	Gold	Platinum	Emerald US In-country Support	Emerald Middle East Premier
Case (Ticket) via My OPSWAT	12 hours (business days)	24 hours (business days)	24 hours	24 hours	24 hours
Via Live Agent Chat	12 hours (business days)	24 hours (business days)	24 hours (business days)	13 hours (business days)	24 hours [business days]
Via Phone	8	24 hours (business days)	24 hours	24 hours	24 hours



Protecting the World's Critical Infrastructure

Country of Origin Mexico Environmental Operating Thermal 32°F to 95°F (0°C to 35°C) Storage Humidity 0% to 95% Operating Humidity 10% to 90% Regulatory Environmental FCC, ISED, CE Mark, UKCA Computing Operating System Windows and Linux available					
RAM 32GB Storage 1TB M.2 SSD OPA Scanning Performance Speed Up to 13,000 files/minute Connectivity Ports 4x USB A 3.2 Gen 2* 2x USB A 3.1 Gen 1 2xUSB C 3.2 Gen 2 1x SD Card** Physical Weight 13.26 lbs. [6.02kg] Dimensions 21.26"x 13.95"x 2.28' Country of Origin Mexico Environmental Operating Thermal Range (0°C to 35°C) Storage Humidity 0% to 95% Operating Humidity 10% to 90% Regulatory Environmental Computing Operating System Windows and Linux available	Hardware				
Storage 1TB M.2 SSD OPA Scanning Performance Speed Up to 13,000 files/minute Connectivity Ports 4x USB A 3.2 Gen 2* 2x USB A 3.1 Gen 1 2xUSB C 3.2 Gen 2 1x SD Card** Physical Weight 13.26 lbs. [6.02kg] Dimensions 21.26"x 13.95"x 2.28* Country of Origin Mexico Environmental Operating Thermal Range [0°C to 35°C] Storage Humidity 0% to 95% Operating Humidity 10% to 90% Regulatory Environmental Compliance FCC, ISED, CE Mark, UKCA Computing Operating System Windows and Linux available	CPU	9 285 [24 cores, 24			
Scanning Performance Speed Up to 13,000 files/minute Connectivity Ports 4x USB A 3.2 Gen 2* 2x USB A 3.1 Gen 1 2xUSB C 3.2 Gen 2 1x SD Card** Physical Weight 13.26 lbs. [6.02kg] Dimensions 21.26"x 13.95"x 2.28' Country of Origin Mexico Environmental Operating Thermal Range [0°C to 35°C] Storage Humidity 0% to 95% Operating Humidity 10% to 90% Regulatory Environmental Compliance FCC, ISED, CE Mark, UKCA Computing Operating System Windows and Linux available	RAM	32GB			
Speed Up to 13,000 files/minute Connectivity Ports 4x USB A 3.2 Gen 2* 2x USB A 3.1 Gen 1 2xUSB C 3.2 Gen 2 1x SD Card** Physical Weight 13.26 lbs. [6.02kg] Dimensions 21.26"x 13.95"x 2.28* Country of Origin Mexico Environmental Operating Thermal Range 20°C to 35°C] Storage Humidity 0% to 95% Operating Humidity 10% to 90% Regulatory Environmental FCC, ISED, CE Mark, UKCA Computing Operating System Windows and Linux available	Storage	1TB M.2 SSD OPA			
Connectivity Ports 4x USB A 3.2 Gen 2* 2x USB A 3.1 Gen 1 2xUSB C 3.2 Gen 2 1x SD Card** Physical Weight 13.26 lbs. [6.02kg] Dimensions 21.26"x 13.95"x 2.28' Country of Origin Mexico Environmental Operating Thermal Range (0°C to 35°C) Storage Humidity 0% to 95% Operating Humidity 10% to 90% Regulatory Environmental Computing Operating System Windows and Linux available	Scanning Performance				
Ports 4x USB A 3.2 Gen 2* 2x USB A 3.1 Gen 1 2xUSB C 3.2 Gen 2 1x SD Card** Physical Weight 13.26 lbs. [6.02kg] Dimensions 21.26"x 13.95"x 2.28' Country of Origin Mexico Environmental Operating Thermal Range 32°F to 95°F [0°C to 35°C] Storage Humidity 0% to 95% Operating Humidity 10% to 90% Regulatory Environmental FCC, ISED, CE Mark, UKCA Computing Operating System Windows and Linux available	Speed				
2x USB A 3.1 Gen 1 2xUSB C 3.2 Gen 2 1x SD Card** Physical Weight 13.26 lbs. [6.02kg] Dimensions 21.26"x 13.95"x 2.28' Country of Origin Mexico Environmental Operating Thermal Range 32°F to 95°F [0°C to 35°C] Storage Humidity 0% to 95% Operating Humidity 10% to 90% Regulatory Environmental FCC, ISED, CE Mark, UKCA Computing Operating System Windows and Linux available	Connectivity				
Weight 13.26 lbs. [6.02kg] Dimensions 21.26"x 13.95"x 2.28" Country of Origin Mexico Environmental Operating Thermal Range 32°F to 95°F [0°C to 35°C] Storage Humidity 0% to 95% Operating Humidity 10% to 90% Regulatory Environmental FCC, ISED, CE Mark, UKCA Computing Operating System Windows and Linux available	Ports	2x USB A 3.1 Gen 1 2xUSB C 3.2 Gen 2			
Dimensions 21.26"x 13.95"x 2.28" Country of Origin Mexico Environmental Operating Thermal 32°F to 95°F (0°C to 35°C) Storage Humidity 0% to 95% Operating Humidity 10% to 90% Regulatory Environmental FCC, ISED, CE Mark, UKCA Computing Operating System Windows and Linux available	Physical				
Country of Origin Mexico Environmental Operating Thermal 32°F to 95°F (0°C to 35°C) Storage Humidity 0% to 95% Operating Humidity 10% to 90% Regulatory Environmental FCC, ISED, CE Mark, UKCA Computing Operating System Windows and Linux available 1x on side, 3x additional on back	Weight	13.26 lbs. [6.02kg]			
Environmental Operating Thermal Range 32°F to 95°F (0°C to 35°C) Storage Humidity 0% to 95% Operating Humidity 10% to 90% Regulatory Environmental FCC, ISED, CE Mark, UKCA Computing Operating System Windows and Linux available	Dimensions	21.26"x 13.95"x 2.28"			
Operating Thermal Range 32°F to 95°F (0°C to 35°C) Storage Humidity 0% to 95% Operating Humidity 10% to 90% Regulatory Environmental FCC, ISED, CE Mark, UKCA Computing Operating System Windows and Linux available	Country of Origin	Mexico			
Range [0°C to 35°C] Storage Humidity 0% to 95% Operating Humidity 10% to 90% Regulatory Environmental FCC, ISED, CE Mark, UKCA Computing Operating System Windows and Linux available 1x on side, 3x additional on back	Environmental				
Operating Humidity 10% to 90% Regulatory Environmental FCC, ISED, CE Mark, UKCA Computing Operating System Windows and Linux available 1x on side, 3x additional on back					
Regulatory Environmental FCC, ISED, CE Compliance Mark, UKCA Computing Operating System Windows and Linux available 1x on side, 3x additional on back	Storage Humidity	0% to 95%			
Environmental FCC, ISED, CE Compliance Mark, UKCA Computing Operating System Windows and Linux available 1x on side, 3x additional on back	Operating Humidity	10% to 90%			
Computing Operating System Windows and Linux available 1x on side, 3x additional on back	Regulatory				
Operating System Windows and Linux available 1x on side, 3x additional on back					
Linux available 1x on side, 3x additional on back	Computing				
	Operating System				
Some cards require a standard adapter	1x on side, 3x additional on ba **Some cards require a stanc				